

SX4

BENCH MILL DRILL

Specifications

Drilling capacity	30 mm
Max. tapping capacity	16 mm
End mill capacity	40 mm
Face mill capacity	55 mm
Longitudinal axis (X)	450 mm
Cross axis (Y)	245 mm
Headstock travel (Z)	335 mm
Spindle taper	MT4 or R8
Throat	290 mm
Max distance spindle to table	430 mm
Table effective size	240x820 mm
T-slot size	14 mm
Head tilt	45°L, 45°R
Motor output power (brushless motor)	1500 W
Spindle speed (variable speed)	100-1600 ±10% rpm
Overall dimension (LxWxH)	1060x840x1160 mm
Packing size (LxWxH)	1040x920x1300 mm
Weight (Net/Gross)	230/260 kg

Standard attachment

- Ø16 mm Drill chuck
- Wrench set
- Oil can

Features

- 1500W Brushless DC motor
- Tapping function
- Fine feeding function
- Tilting headstock ,angle digital readout
- Digital readout for drilling depth
- Spindle speed readout



Check reviews at www.mini-lathe.com/Mini_mill/Reviews/Reviews.htm

SX4-pro

BENCH MILL DRILL

With 3-axis Digital readout , power feeder , stand



Tilting angle display




LED working lamp



Drilling depth display



Tapping button

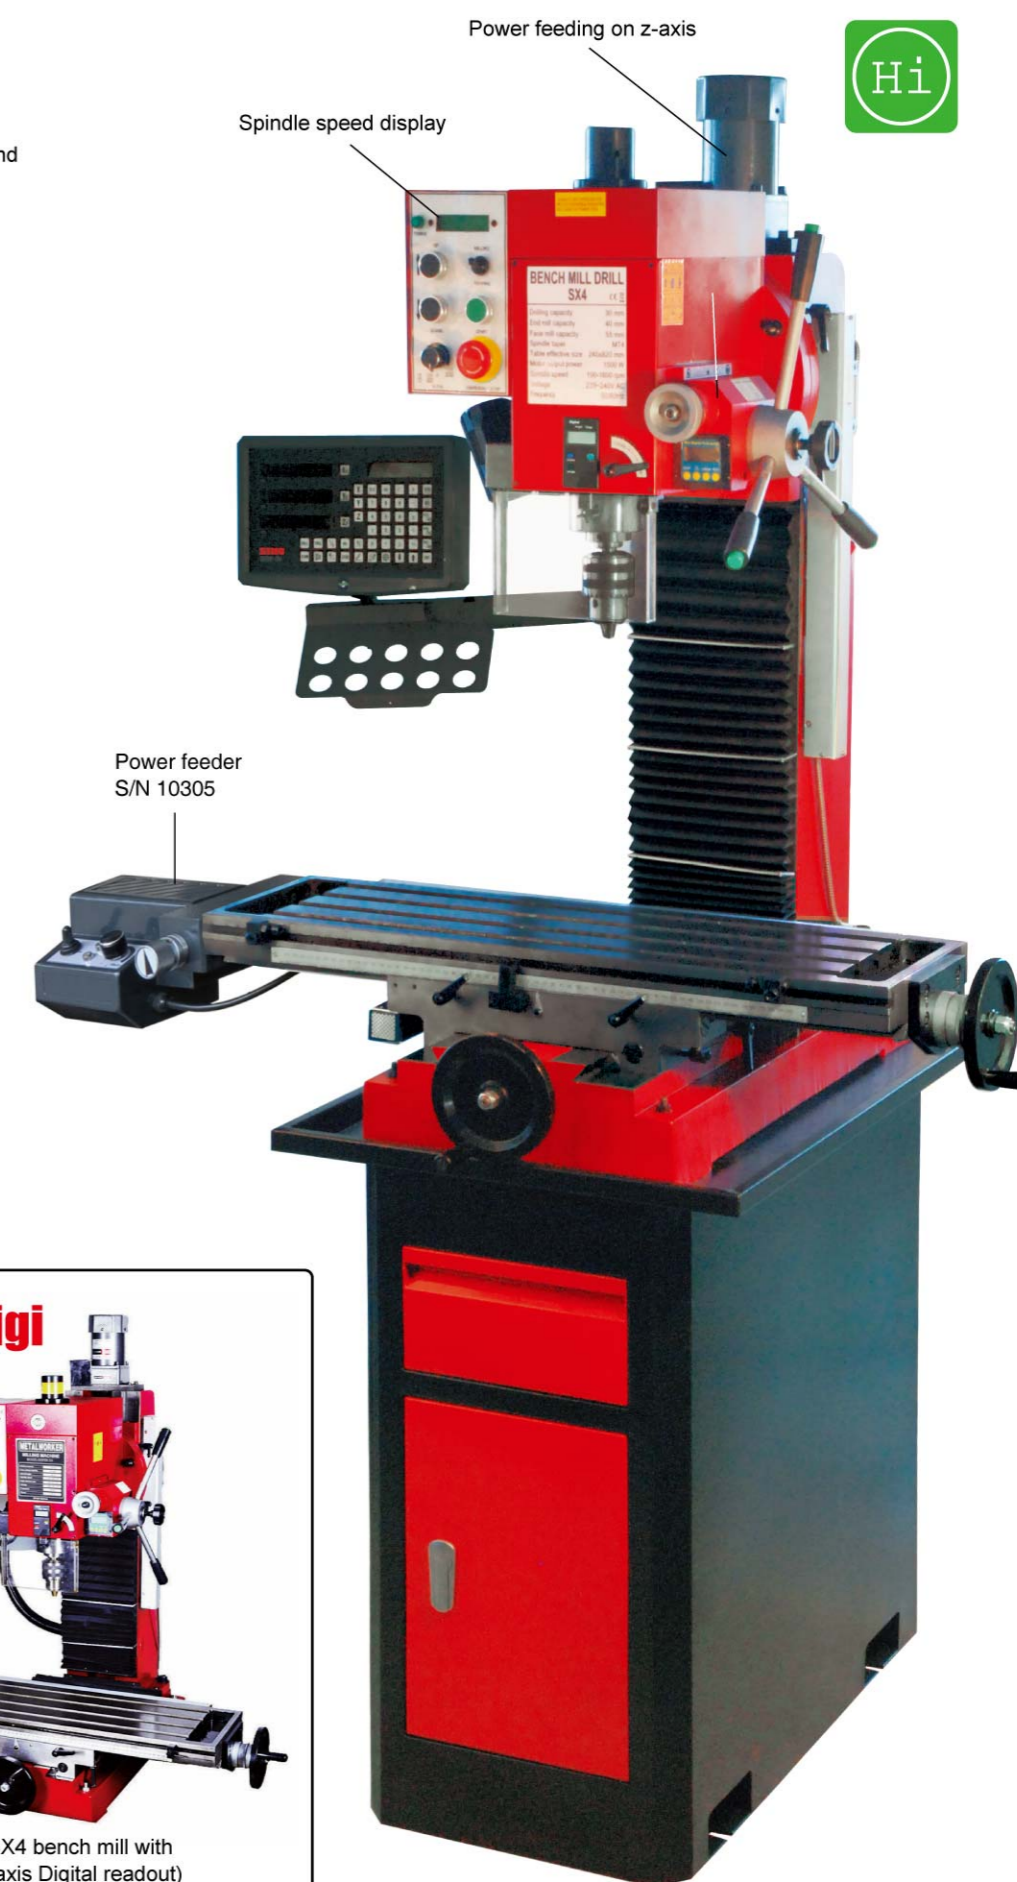

Power feeding on z-axis

Spindle speed display

Power feeder
S/N 10305

OPTIONAL ACCESSORIES

Stand



S/N:10244
Overall dimension:
550x835x850mm

Rotary table



size 150mm
S/N:10143

Optional accessory for S/N:10143

3-jaw chuck (Self-centering)



Ø125mm
S/N:10101

4-jaw chuck (Independent)



Ø125mm
S/N:10025

Dividing plate (for S/N:10143)



S/N:10143-1

Tailstock (for S/N:10143)



S/N:10143-2

Mill chuck set



MT#3

Chuck dia.4,6,8,
10,12,14,16mm
S/N:10037

3-axis digital readout



S/N: 10230

Indexable carbide end mill



MT#3
ø50mm

S/N:10113

Vice (QH type)



125mm

S/N:10048

Clamping kit



58 pcs.
Bolt size:12mm
24 studs,6 step block pairs,
6 T nuts, 6 flange nuts,
4 coupling nuts, 6 end holddowns
S/N:10049

Power feeder



S/N:10305

SX4-Digi



(SX4 bench mill with
3-axis Digital readout)