

X2.7

Bench Mill

Specifications	X2.7	X2.7L
Drilling capacity	20 mm	20 mm
End milling capacity	16 mm	16 mm
Face milling capacity	50 mm	50 mm
Longitudinal travel (X)	400mm	500mm
Cross travel (Y)	190mm	170mm
Headstock travel(Z)	290 mm	290 mm
Spindle taper	MT3 or R8	MT3 or R8
Throat	190 mm	190 mm
Max. distance spindle to table	370 mm	370 mm
Table effective size	600x140 mm	700x160 mm
T-slot size	12 mm	12 mm
Power	750 W	750 W
Spindle speed	100-2000 rpm± 10%	100-2000 rpm± 10%
Overall dimension (LxWxH)	725x620x880mm	825x620x880mm
Packing size (LxWxH)	840x760x1060mm	940x760x1060mm
Weight(Net&Gross)	101/135kg	111/145kg

Features

- Variable spindle speed
- Feeding depth and spindle speed digital readout
- Fine feeding function
- Long worktable
- Solid column

Standard attachment

Ø13mm drill chuck Wrench set Oil can 3 Axis DRO



SX2.7

Bench Mill


Specifications	SX2.7	SX2.7L
Drilling capacity	20 mm	20 mm
Max. tapping capacity	12 mm	12 mm
End milling capacity	16 mm	16 mm
Face milling capacity	50 mm	50 mm
Longitudinal travel (X)	400mm	500mm
Cross travel (Y)	190mm	170mm
Headstock travel(Z)	290 mm	290 mm
Spindle taper	MT3 or R8	MT3 or R8
Throat	190 mm	190 mm
Max. distance spindle to table	370 mm	370 mm
Table effective size	600x140mm	700x160mm
T-slot size	12 mm	12 mm
Power	750 W	750 W
Spindle speed	100-2000 rpm	100-2000 rpm
Overall dimension (LxWxH)	725x620x880mm	825x620x880mm
Packing size (LxWxH)	840x760x1060mm	960x760x1060mm
Weight(Net&Gross)	101/135kg	111/145kg

Features

- Variable spindle speed
- Feeding depth and spindle speed digital readout
- Touching switch panel
- Tapping function
- Brushless DC motor
- Fine feeding function
- Long worktable
- Solid column

Standard attachment

Ø13mm drill chuck
Wrench set
Oil can

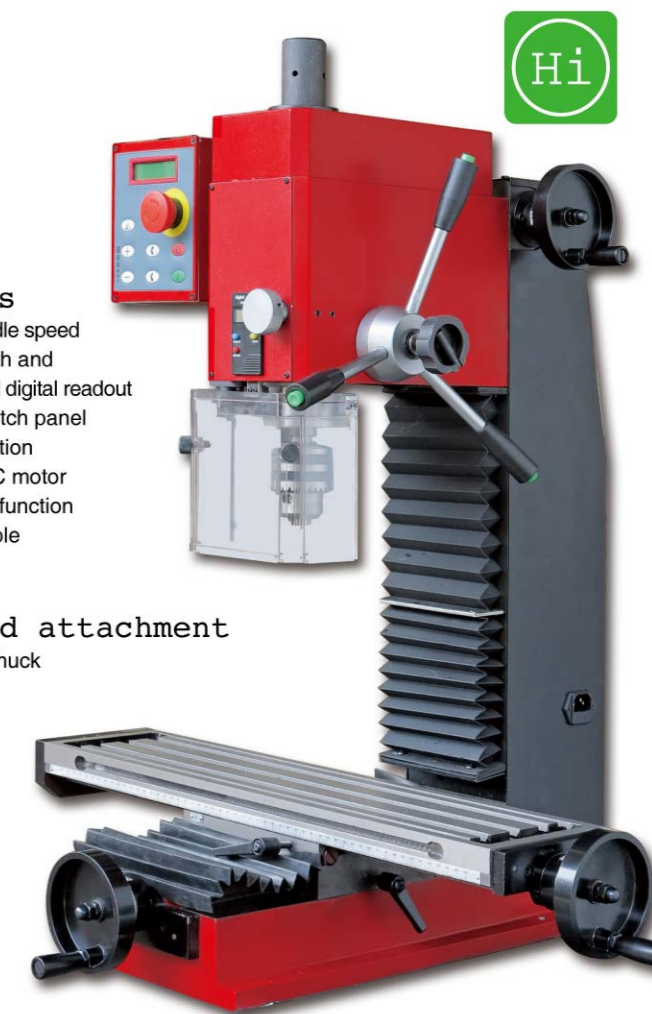

OPTIONAL ACCESSORIES

<p>Rotary table size 100mm</p> <p>S/N:10094</p>	<p>Optional accessory for S/N:10094, S/N:10094A</p> <p>3-jaw chuck (Self-centered) Ø80 mm S/N:10190</p> <p>Dividing plate S/N: 10094-1</p>	<p>Work table with angle</p> <p>Angle range 0-90° T-slot size 8mm S/N: 10135</p>	<p>Power feeder</p> <p>S/N:10303 for X2.7, SX2.7 S/N:10306 for X2.7L, SX2.7L</p>	<p>Mill chuck set</p> <p>MT#3 Chuck dia. 4, 6, 8, 10, 12, 14, 16mm S/N:10037</p>	<p>2 Flute Hss end mill</p> <p>Chuck dia. 4. 6. 8. 10. 12. 14. 16mm S/N:10045</p>	<p>Clamping kit</p> <p>42 pcs. Bolt size:10mm include:12 studs, 6 step block pairs, 4 T nuts, 4 flange nuts, 4 coupling nuts, 6 end holddowns S/N:10047</p>
<p>Rotary table size 100mm</p> <p>S/N:10094A</p>	<p>4-jaw chuck (Independent) Ø80 mm S/N:10010</p> <p>Tailstock S/N: 10094-2</p>	<p>Vice with angle</p> <p>Width 100mm S/N: 10142</p>	<p>Vice</p> <p>Width 80mm S/N:10109</p>	<p>Quick Vice</p> <p>Width 100mm S/N: 10036</p>	<p>Indexable carbide end mill</p> <p>MT#3 Ø30mm S/N:10046</p>	<p>Indexable carbide end mill</p> <p>MT#3 Ø50mm S/N:10113</p>
				<p>MT#3 collet</p> <p>Ø4mm S/N:10119 Ø6mm S/N:10120 Ø8mm S/N:10121 Ø10mm S/N:10122 Ø12mm S/N:10123 Ø14mm S/N:10124 Ø16mm S/N:10125 Ø4-16mm set S/N:10126</p>		

OPTIONAL ACCESSORIES

SX2.7 with stand, power feeder and 3 Axis Digital Readout

Power feeder S/N 10306

Stand
Overall dimension: 460x730x880mm
S/N:10240A

